

## NewBingo series semi-electric mini lifter

Multifunction mini lifter with manual drive and electric lifting. Available with load capacity of 100 or 200 kg and with lifting heights of 1500 or 2000 mm. Fitted with two 12V 38Ah batteries that require no maintenance and a 24V 6A built-in charger. Painted steel or Aisi 304 stainless steel frame, aluminium mast and ABS cover. Poly castor wheels with parking brakes and individual fixed poly rollers with the standard version, also available with front twin or castor wheels. It can be provided with different standard accessories (refer to the table regarding residual loads) or with equipment designed specifically according to the customer's requirements. For further information, visit the site www. levanteminilifter.com. Made in Italy.

## **Tools**











SR - Spur with rollers

S - Spur

C - Rollers platform

PV - Glass Holder

F - Forks

B - Reel Holder



R - Roto-reel

P - Platform

WS - Weighing Forks



G - Crane Arm









CF - Frontal Reel holder



Detail of frontal swivel rollers (optional)



Detail of rear swivel wheels with brake



Detail control plate




The images are indicative, products and specifications are subject to change without notice




## **NewBingo** series semi-electric mini lifter

| Mod. | Tools               | Descrip.  | Dimensions<br>LxW mm | Material       | Note   | NEWBINGO<br>100 | NEWBINGO<br>200 | NEWBINGO<br>100.2 | NEWBINGO<br>200.2                         |
|------|---------------------|---|----------------------|----------------|--|-----------------|-----------------|-------------------|---|
| F    | Forks               |   | 600x375              | Painted Steel  | Available also in<br>Stainless steel Aisi 304  | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| DS   | Double<br>spur      |   | 600x240/360          | Painted Steel  |  | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| s    | Spur                |   | 600                  | Painted Steel  | Available also in<br>Stainless steel Aisi 304  | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| SR   | Spur with rollers   | with 6 nylon rollers and<br>safety stop             | 540                  | Painted Steel  |  | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| В    | Reel Holder         |   | 600x390              | Painted Steel  | Available also in<br>Stainless steel Aisi 304  | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| CF   | Frontal Reel Holder |   |                      | Painted Steel  | Available also in<br>Stainless steel Aisi 304  | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| BP   | Swivel Reel Holder  |   | 600x400              | Painted Steel  | Available also in<br>Stainless steel Aisi 304  | 100             | 150             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| A    | Clamp               | Ø Min/max Reels and<br>Drums Ø 300/600 mm           |                      | Painted Steel  | Available also in<br>Stainless steel Aisi 304  | -               | 100             | -                 | 100                                       |
| P    | Platform            | Screwed on Forks                                    | 600x500              | White<br>Nylon | Available also in<br>smooth painted plate<br>or in checker plate or<br>stainless steel Aisi 304<br>or 316. | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| C    | Rollers Platform    | with 6 rollers and upper protection and side guards | 600x500              | Painted Steel  | Available with perpen-<br>dicular and parallel to<br>the forks   | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| G    | Crane Arm           | 5 position Swivel Hook                              | 600                  | Painted Steel  |  | 100             | 150             | 70                | 70  |
| PV   | Glass Holder        | with adjustable sucker                              |                      | Painted Steel  |  | 100             | -               | 100               | -   |
| ws   | Weighing Forks      | with Ravas weighing<br>system                       | 590x370              | Painted Steel  |  | 100             | 200             | 100               | 200 fino a 1.5 m<br>100 da 1.5 a<br>2.0 m |
| R    | Roto Reels          |   |                      | Painted Steel  |  | 50              | 100             | 50                | 100                                       |

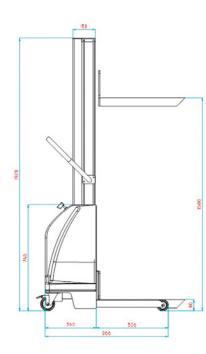

| Model               |         | NEWBINGO 100 | NEWBINGO 100.2 | NEWBINGO 200 | NEWBINGO 200.2                           |  |  |  |  |
|---------------------|---------|--------------|----------------|--------------|--|--|--|--|--|
| Capacity*           | kg      | 100          | 100            | 200          | 200 fino a 1500 mm<br>100 fino a 2000 mm |  |  |  |  |
| Lifting<br>min /max | mm      | 80/1500      | 80/2000        | 80/1500      | 80/2000                                  |  |  |  |  |
| Mast Height         | mm      | 1920         | 2420           | 1920         | 2420                                     |  |  |  |  |
| Rollers             | N/ø mm  | 2/80 x 30    |                |              |  |  |  |  |  |
| Wheels              | N/ø mm  | 2/ 100 x 30  |                |              |  |  |  |  |  |
| Lifting motor       | V/W     | 24/300       | 24/330         |              |  |  |  |  |  |
| Lifting speed       | cm/sec  | 8,3/6,0      | 8,3/5,0        |              |  |  |  |  |  |
| Battery             | Nx V/Ah |              | 2x12V          | V/38Ah       |  |  |  |  |  |
| Charger             | V/A     | 24/6 a bordo |                |              |  |  |  |  |  |
| Weight              | kg      | 100          | 110            | 100          | 110                                      |  |  |  |  |

\* Always check the actual capacity of the truck with the table tools



Levante srl Via del Lavoro 9/11 46035 Ostiglia (MN) – Italy Tel +39 0386 – 801814 Fax + 39 0386 -801955 www.levanteminilifter.com info@levanteminilifter.com

www.levanteminilifter.com