


➤ Spindle for Minilifter up to 200

Spur for horizontal handling of reels on pallets or on the ground (check the width of the front races in the latter case).
It should be placed in place of the forks.

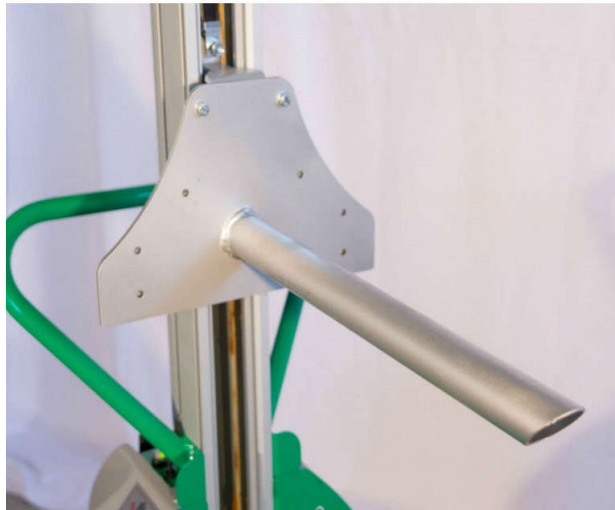

Model		S
Description		Spindle
Max capacity	kg	200
Loadcenter	mm	300
Minimum Height	mm	95
Max Height	mm	max lift. H + 75
Lenght	mm	600
Diameter	mm	50

Model	Residual capacities
Handy	100
Handy CB	100
New bingo	200
Clever	120