


## ➤ Spindle with rollers for Minilifter up to 200

Spindle complete with nylon rollers and toe safety catch. Ideal for horizontal handling of coils on pallets or on the ground (check the width of front races in the latter case). It should be placed in place of the forks.

It can also be welded to the highest part of the plate in order to reach higher elevations, in this case verify the residual capacity according to the chosen minilifter.

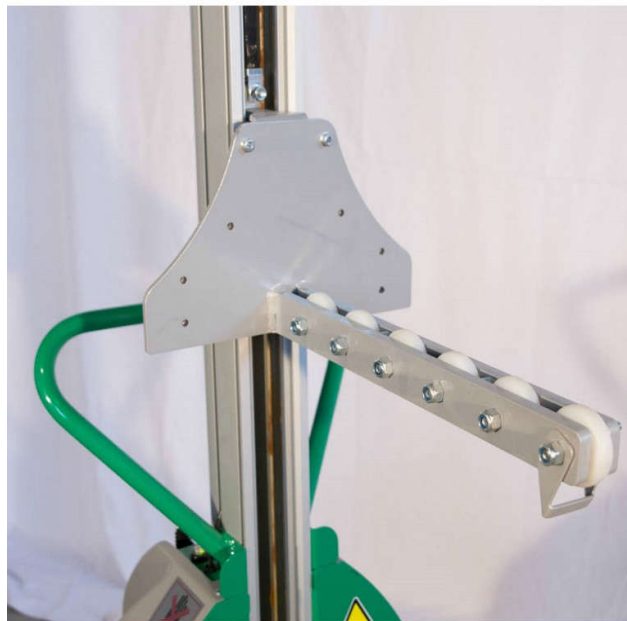

Model	SR	
Description		Spindle w/rollers
Max capacity	kg	200
Loadcenter	mm	270
Minimum Height	mm	55
Thickness	mm	65
Lenght	mm	540
Roller diameter	mm	70

Model	Residual capacities
Handy	100
Handy CB	100
New bingo	200
Clever	120